

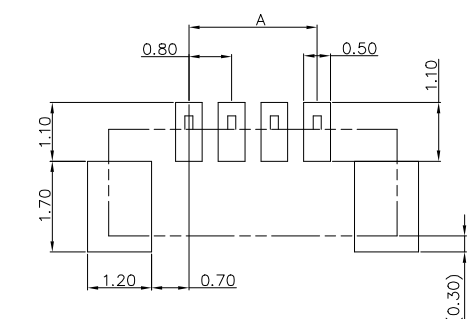

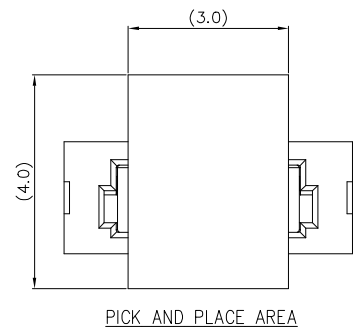
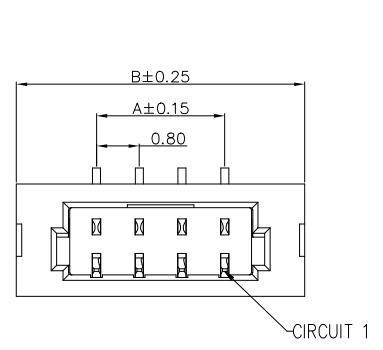



PRODUCT NUMBER
SEE PART NO. TABLE



TOLERANCE: ±0.05
RECOMMENDED P.C.B. Layout
TOP VIEW

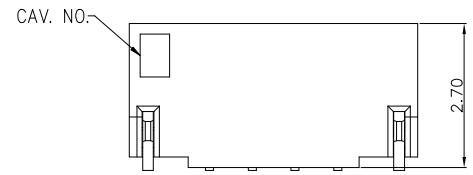

Mating Condition (REF.)

NOTES:

- MATERIAL:
INSULATION(HALOGEN FREE): THERMOPLASTIC HIGH TEMP,UL94V-0,GLOW WIRE COMPATIBLE
CONTACT: COPPER ALLOY, t=0.15
- MATE WITH RECEPTACLE: AFCI 10145492
- THE INSULATION CAN WITHSTAND IR REFLOW 260°C FOR 10 SECONDS
- PRODUCT SPEC: GS-12-1444
- PACKAGING SPEC: GS-14-2616
- ORDERING CODE: 10144042-XX X X X LF

NO. OF PINS	XX	X	X	X	LF	PACKAGE
02~20 PIN						1: TAPE & REEL
INSULATION COLOR						CONTACT FINISH
0: CREAM						1: MATTE-TIN PLATED OVER NICKEL
						2: GOLD FLASH OVER NICKEL

PIN	A	B	PIN	A	B
02	0.80	3.80	12	8.80	11.80
03	1.60	4.60	13	9.60	12.60
04	2.40	5.40	14	10.40	13.40
05	3.20	6.20	15	11.20	14.20
06	4.00	7.00	16	12.00	15.00
07	4.80	7.80	17	12.80	15.80
08	5.60	8.60	18	13.60	16.60
09	6.40	9.40	19	14.40	17.40
10	7.20	10.20	20	15.20	18.20
11	8.00	11.00			

mat'l. code	surface	tolerance	projection
	ISO 1302 ✓	ISO 406 ISO 1101	1101
ltr	ecn no	dr	date
	angles	linear	mm
	0°±x'	.X±.25 .XX±.15 .XXX±.08	scale 1:1
dr	TONY LENG	2017-05-22	
engr	TONY LENG	2017-05-22	
chr	ZK HU	2017-05-22	
appd	TIM YAO	2017-05-22	
sheet index	revision sheet	A 1	

product family	MINITEK	
title	0.8mm Pitch VT Header SMT	
dwg no	sheet 1 of 1	size
	10144042	A3
type	Product Customer Drawing	

Amphenol FCI
© 2016 AFCI

