
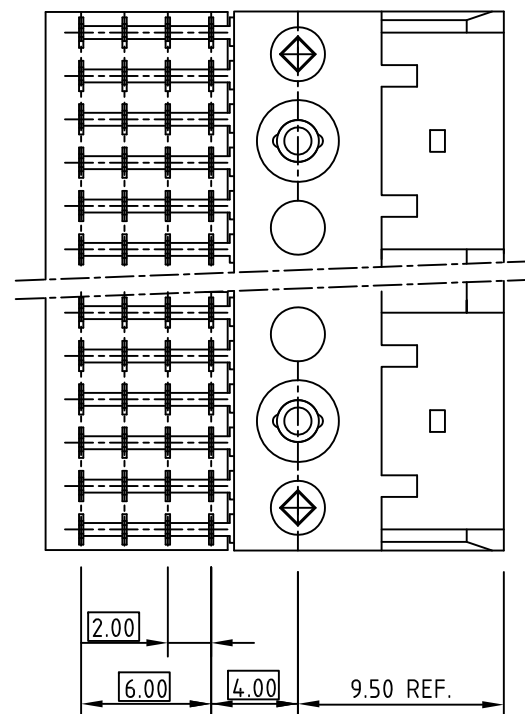
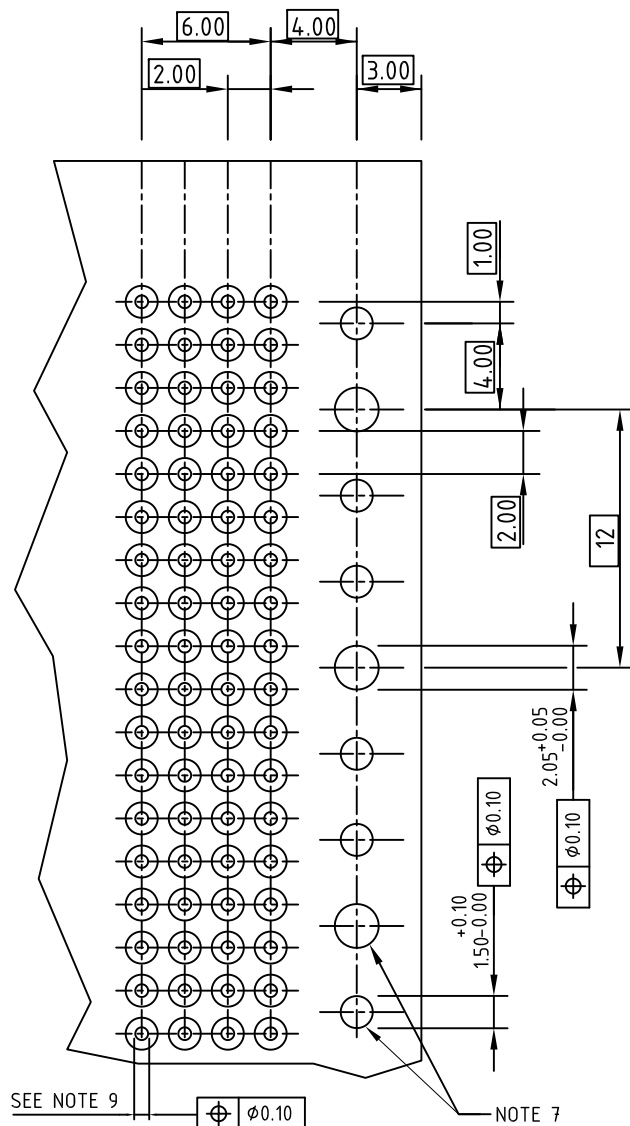
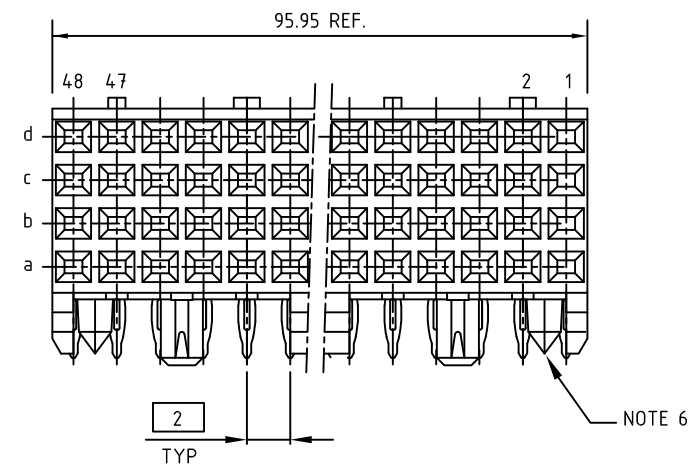


PRODUCT NUMBER	PCB THICKNESS	DIM "A"
88948-X02LF	1.6	2.90
88948-X12LF	2.4	3.53

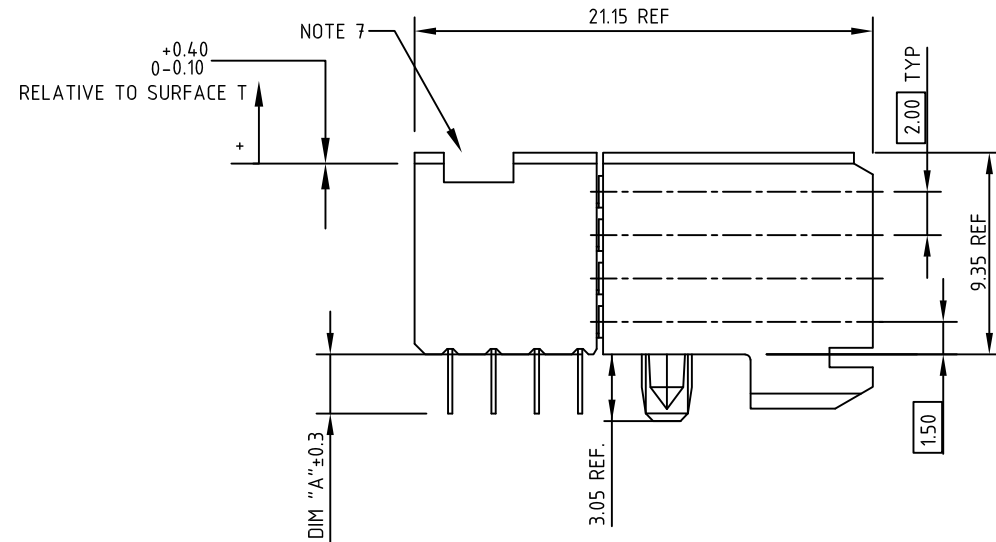

NOTES:

- MATERIAL : BODY : THERMOPLASTIC UL94-V0
CONTACT : COPPER ALLOY.
- FOR PLATING PERFORMANCE REFER DRAWING # 10159408
- PRODUCT SPECIFICATION : GS-12-002
- APPLICATION SPECIFICATIONS : BUS-20-061 , GS-20-001,TA-941
- INDICATED HOLES ARE UNPLATED
- DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
- TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47- 0004
- ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 240°C FOR 60 SECONDS IN A CONVECTION, INFRARED OR VAPOR PHASE REFLOW OVEN.
- A Δ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING NO : 58351.

SEE NOTE 9 ϕ 0.10 NOTE 7

RECOMMENDED PC BOARD LAYOUT,
COMPONENT SIDE.
FOR PTH REFER DRAWING 58351

PART NUMBER : 88948-XYYLF

mat'l. code				surface ISO 1302 <input checked="" type="checkbox"/> ISO 406 ISO 1101		tolerance ISO 1302 <input checked="" type="checkbox"/> ISO 406 ISO 1101		projection 		product family METRAL (tm)			
ltr	ecn no	dr	date	tolerances unless otherwise specified				title					
K	V05-0522	DAI	2005-06-08	angles	linear	.X±0.3				B SERIES R/A SIGNAL RECEPT ASSY 4 ROW, 8 MOD, PF			
L	DG07-0170	CENH	2007-05-22	0°±2°		.XX±0.10							
M	DG08-0171	TER	2008-06-09			.XXX±0.050		scale		dwg no			
N	DG09-0068	CENH	2009-03-03	dr	STU STONER	1992-10-29				sheet 1 of 1			
P	ELX-I-39007	MINI	2020-11-18	engr	ARUN	2020-11-18				88948		size A3	
				chr	ALEX BABU	2020-11-18				type		Product Customer Drawing	
sheet index		revision	P										
		sheet	1										