


PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5A AT 20°C (FULLY LOADED)
- CURRENT RATING: 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR :LF=LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC.201844.003)
- THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004

PCB LAYOUT

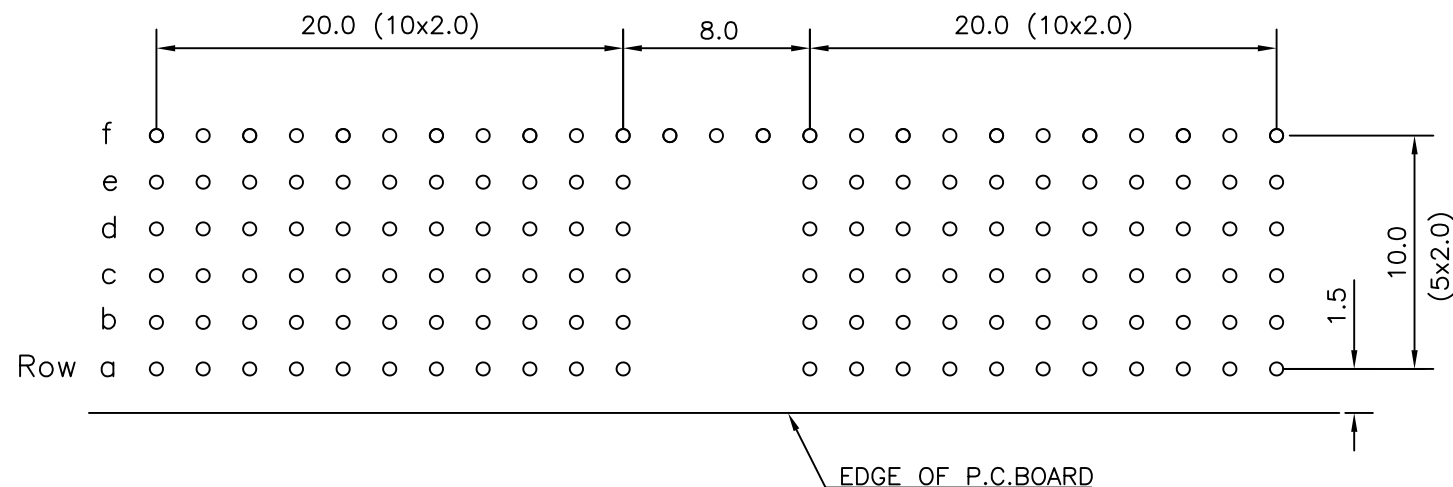

Part No.-HM2R10PA5108----

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406 ISO 1101				MILLIPACS	
ltr		ecn no	dr	date		tolerances unless otherwise specified		title	
A		-	KN	2001-09-14		.0±0.2		MPACS 5+2R RA RCP CONN TYPE A (SHIELDED)	
B		I05-0081	ALEX	2005-05-31		.00±0.1			
C		DG05-0278	KASON	2005-08-02		-		scale -	
D		DG07-0362	KASON	2007-09-05		dr M Fret		1999-03-30	
E		DG10-0110	NZ	2010-10-13		enrg BINESH		2020-11-05	
F		ELX-I-37074	MINI	2020-05-19		chr ALEX		2020-11-05	
G		ELX-I-38844	BIN	2020-11-05		appd SANJO		2020-11-05	
sheet index		revision sheet		G 1					
								dwg no sheet 1 of 1 size BS, C ,201444,036 A3 type Product Customer Drawing	